

# Reverse mathematics and colorings of hypergraphs

Jeff Hirst  
Appalachian State University  
Boone, NC USA

in collaboration with Caleb Davis, Jake Pardo,  
and Tim Ransom

January 18, 2019

ASL 2019 Winter Meeting  
Baltimore Convention Center

## Reverse mathematics

Reverse mathematics uses a hierarchy of axioms of second order arithmetic to measure the strength of theorems.

The language has variables for natural numbers and sets of natural numbers.




The base system,  $\text{RCA}_0$ , includes

- arithmetic facts (e.g.  $n + 0 = n$ ),
- an induction scheme (restricted to  $\Sigma_1^0$  formulas), and
- recursive comprehension (computable sets exist, i.e. sets with programmable characteristic functions exist).

Adding stronger comprehension axioms creates stronger axiom systems.

## Proper colorings of hypergraphs




A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.

A 2-coloring is *proper* if no edge is monochromatic.








## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.



A 2-coloring is *proper* if no edge is monochromatic.



## Proper colorings of hypergraphs

A *hypergraph* consists of vertices and edges. Edges may contain any number of vertices.

A 2-coloring is *proper* if no edge is monochromatic.



# Hypergraphs with finite edges

The system  $ACA_0$  adds arithmetical comprehension to  $RCA_0$  (sets with arithmetically definable characteristic functions exist).

A theorem of reverse mathematics:

**Theorem:** Over  $RCA_0$ , the following are provably equivalent:

1.  $ACA_0$ .
2. Every injection has a range. (Friedman [3], Simpson [5]).
3. Suppose  $H$  is a hypergraph with finite edges presented as a sequence of characteristic functions. If every finite partial hypergraph of  $H$  has a proper 2-coloring, then  $H$  has a proper 2-coloring.

# Hypergraphs with finite edges: Additional observations

Hypergraphs are different from graphs.

**Theorem:**  $\text{RCA}_0$  proves the following are equivalent:

- (1)  $\text{ACA}_0$ .
- (2) Suppose  $H$  is a **hypergraph** with finite edges presented as a sequence of characteristic functions. If every finite partial **hypergraph** of  $H$  has a proper 2-coloring, then  $H$  has a proper 2-coloring.

**Theorem:**  $\text{RCA}_0$  proves the following are equivalent:

- (1)  $\text{WKL}_0$ .
- (2) Suppose  $H$  is a **graph** with finite edges presented as a sequence of characteristic functions. If every finite partial **graph** of  $H$  has a proper 2-coloring, then  $H$  has a proper 2-coloring.

## Hypergraphs with infinite edges

For hypergraphs with infinite edges, there is no arithmetical characterization of hypergraphs with proper 2-colorings. This is a corollary of:

**Theorem:**  $\text{RCA}_0$  proves the following are equivalent:

- (1)  $\Pi_1^1\text{-CA}_0$ , the comprehension scheme for  $\Pi_1^1$  definable sets.
- (2)  $\widehat{\text{HC}}$ : If  $\langle H_i \rangle_{i \in \mathbb{N}}$  is a sequence of hypergraphs, then there is a function  $f : \mathbb{N} \rightarrow 2$  such that  $f(i) = 1$  if and only if  $H_i$  has a proper 2-coloring.

Proof sketch for (1)  $\rightarrow$  (2):

$f(i) = 0$  if and only if every 2-coloring fails to be proper for  $H_i$ . “Fails to be proper” means that for some  $j$ , all the vertices of edge  $E_j$  of  $H_i$  match.



# Hypergraphs with infinite edges: the reversal

For the reversal, we need a combinatorial version of  $\Pi_1^1\text{-CA}_0$ .

**Theorem:**  $\text{RCA}_0$  proves the following are equivalent:


(1)  $\Pi_1^1\text{-CA}_0$ .

(2)  $\widehat{\text{WF}}$ : If  $\langle T_i \rangle_{i \in \mathbb{N}}$  is a sequence of trees with integer labeled nodes, then there is a function  $f : \mathbb{N} \rightarrow 2$  such that  $f(i) = 1$  if and only if  $T_i$  is well founded. (Lemma IV.1.1, Simpson [5])

(3)  $\widehat{\text{WF}}_L$ : If  $\langle T_i, L_i \rangle_{i \in \mathbb{N}}$  is a sequence of trees, each equipped with a leaf set  $L_i$ , then there is a function  $f : \mathbb{N} \rightarrow 2$  such that  $f(i) = 1$  if and only if  $T_i$  is well founded.


## Leaf management

A tree can be converted to a tree with a leaf set by adding an extension with a new label to every existing nodes. The converted tree has the same infinite paths (and the same perfect subtrees).




## Leaf management

A tree can be converted to a tree with a leaf set by adding an extension with a new label to every existing nodes. The converted tree has the same infinite paths (and the same perfect subtrees).

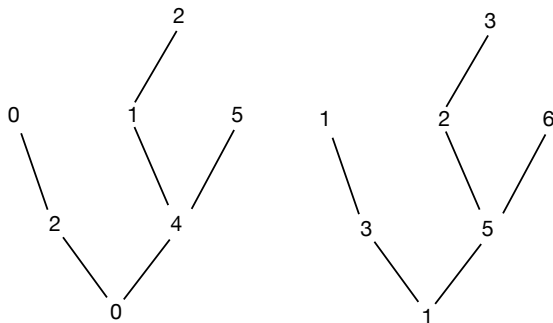


## Leaf management

A tree can be converted to a tree with a leaf set by adding an extension with a new label to every existing nodes. The converted tree has the same infinite paths (and the same perfect subtrees).

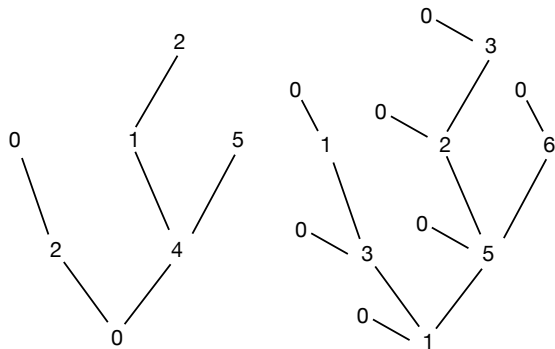


## The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

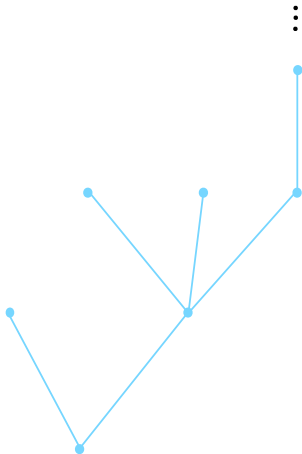


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

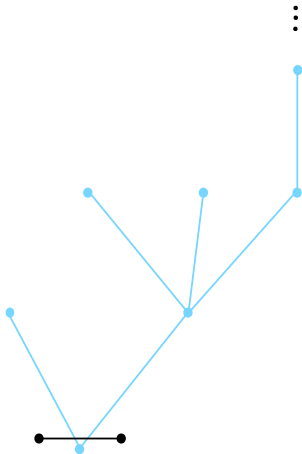


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

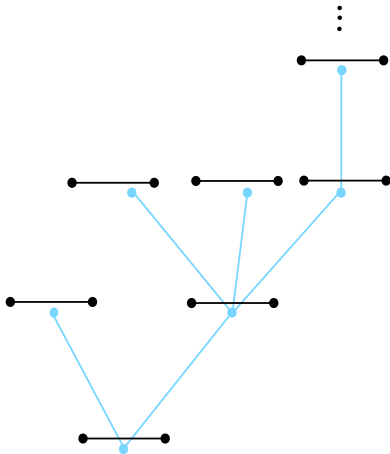

# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$


We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

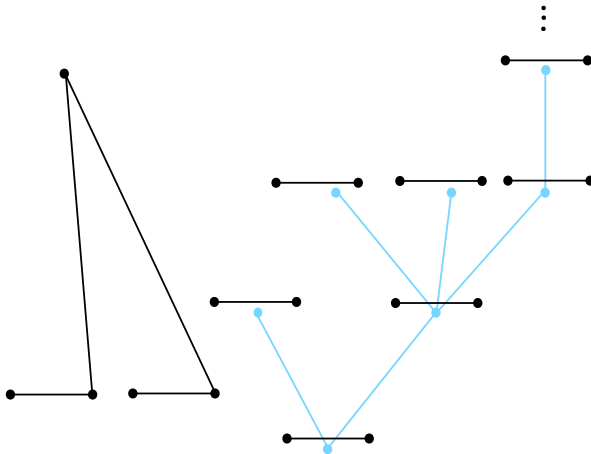




# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

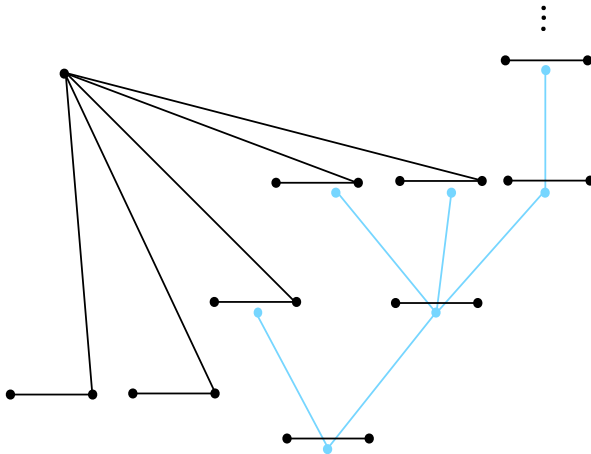


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

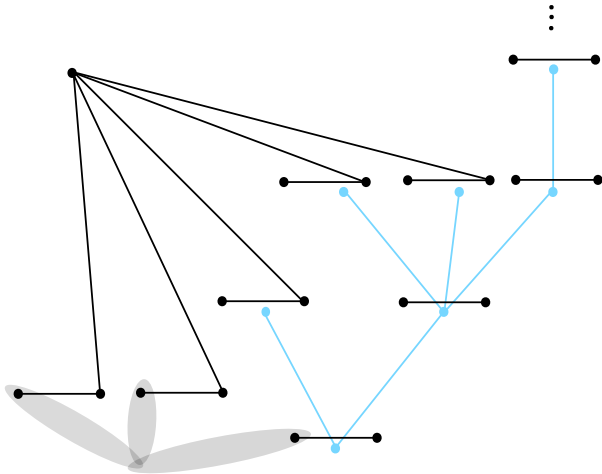


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

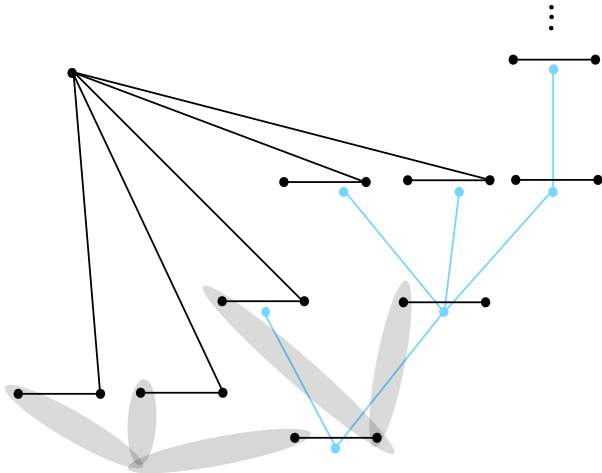


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

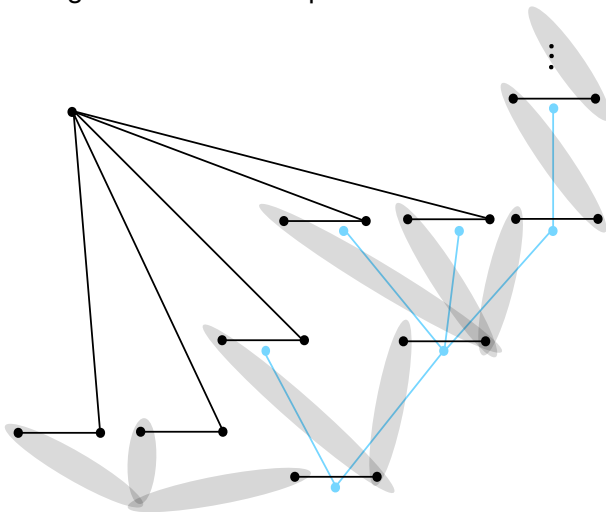


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

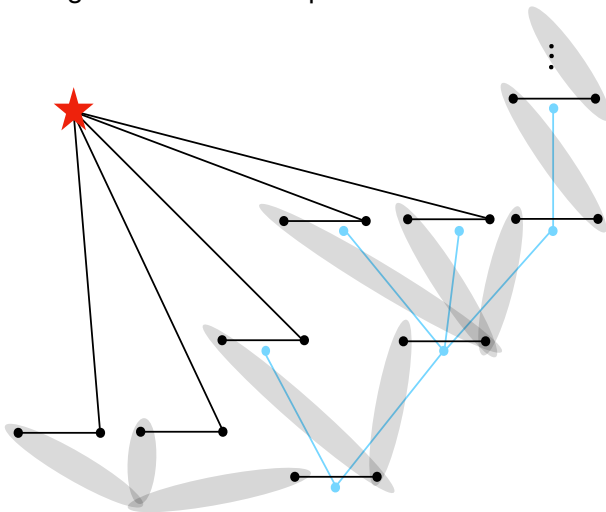


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

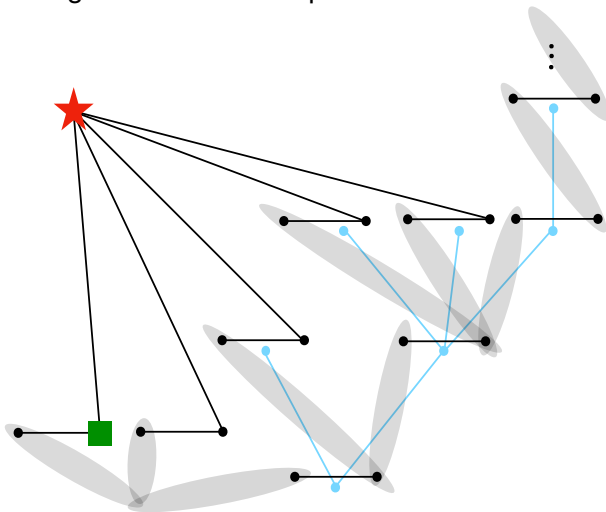


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

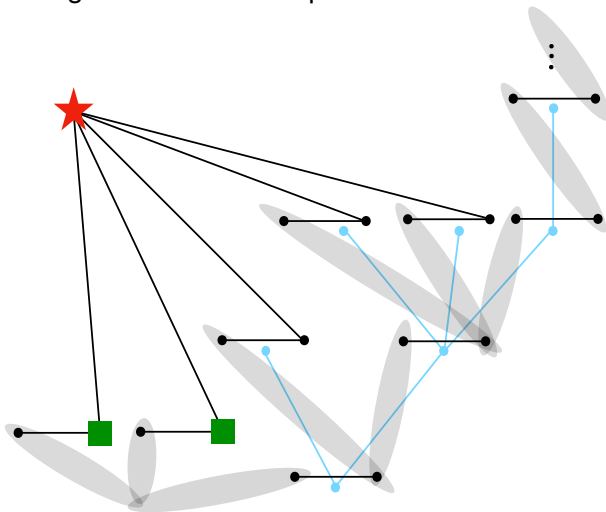

# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$


We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

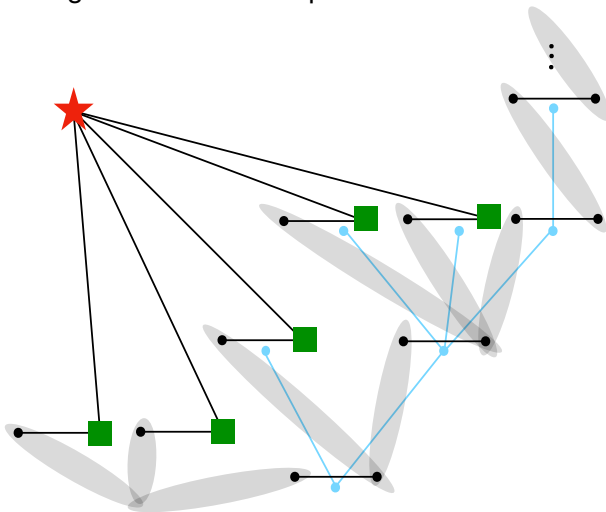




# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

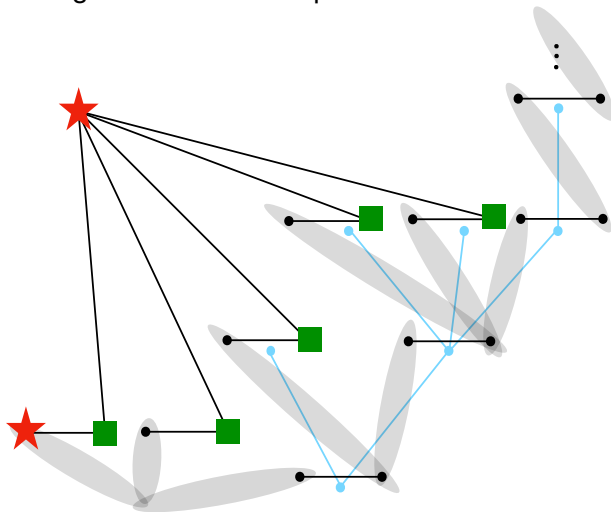

# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

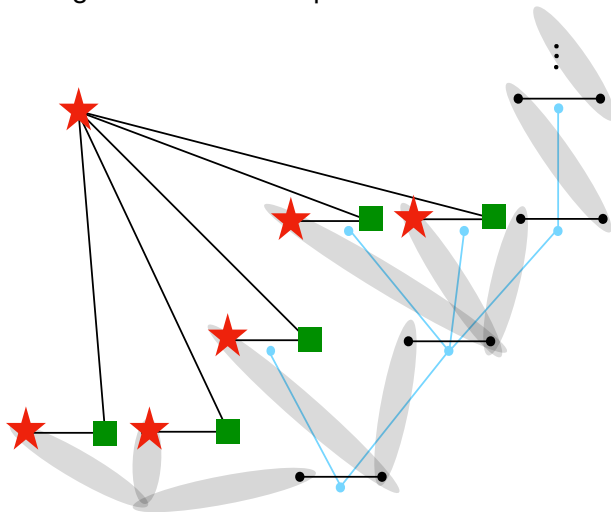







# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

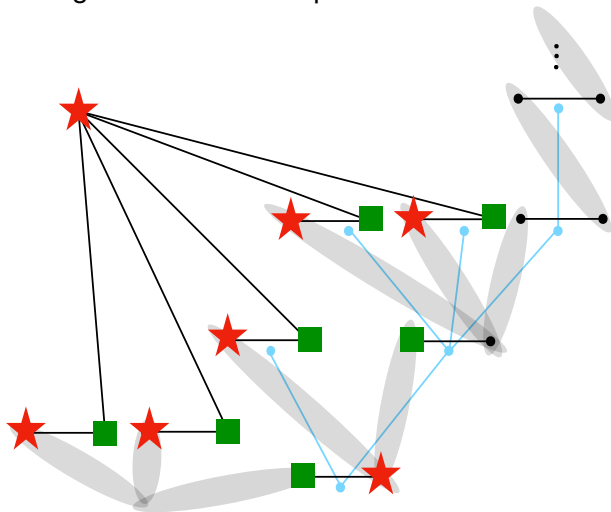


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

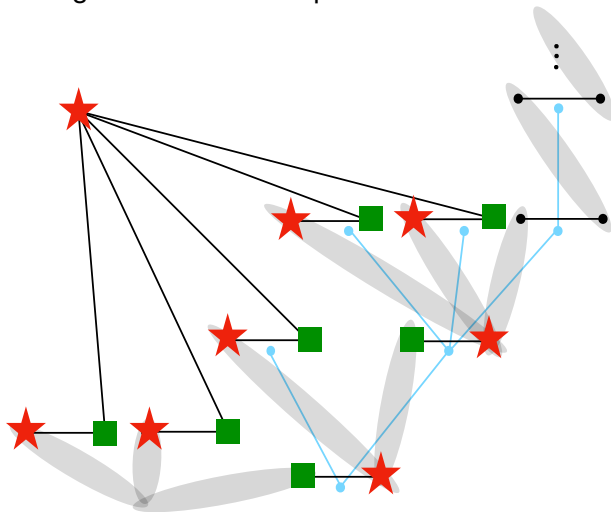

# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

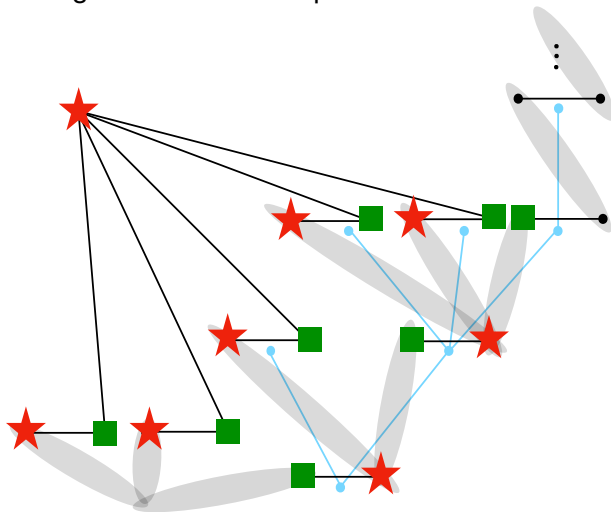







# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

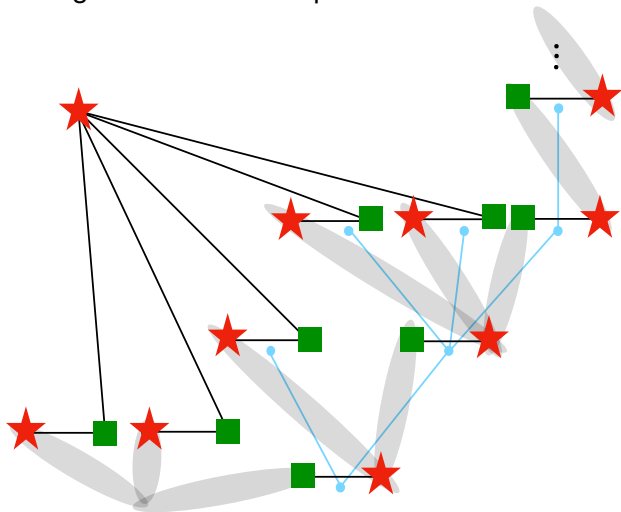


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

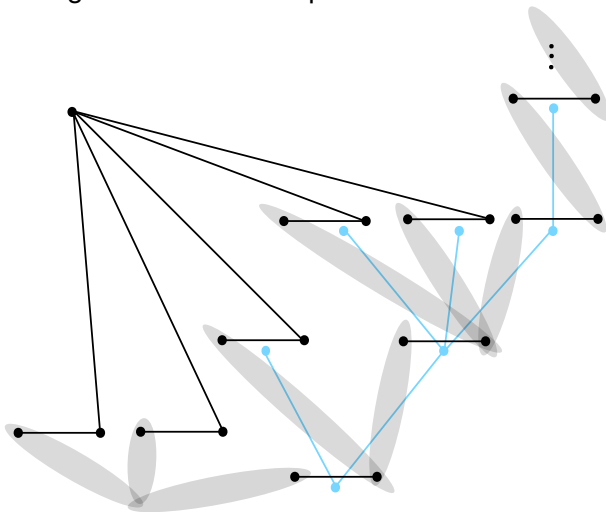


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

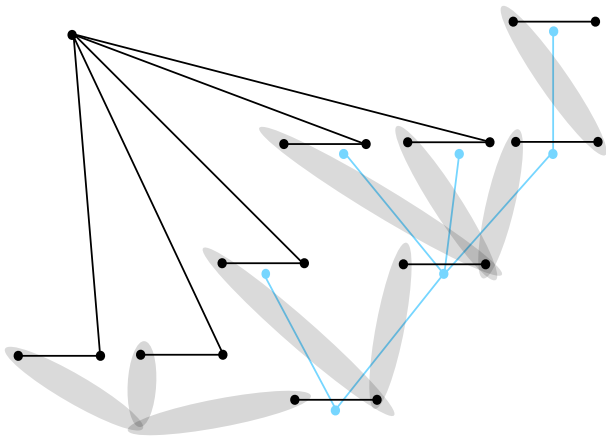


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

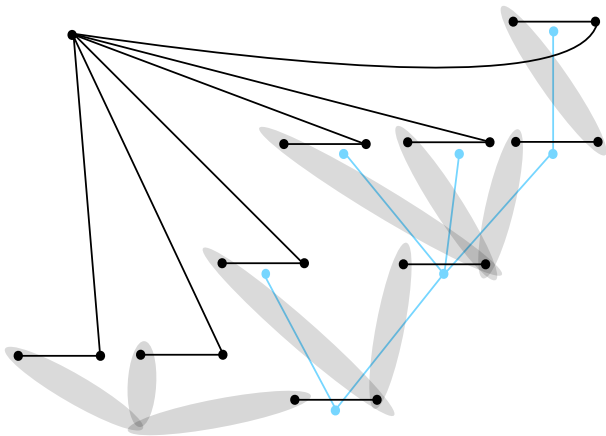


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

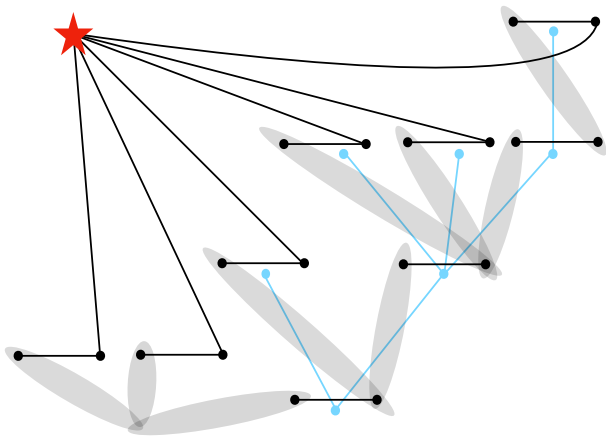


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

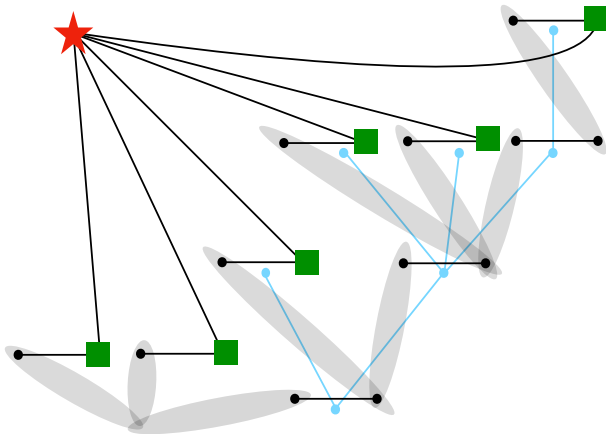


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

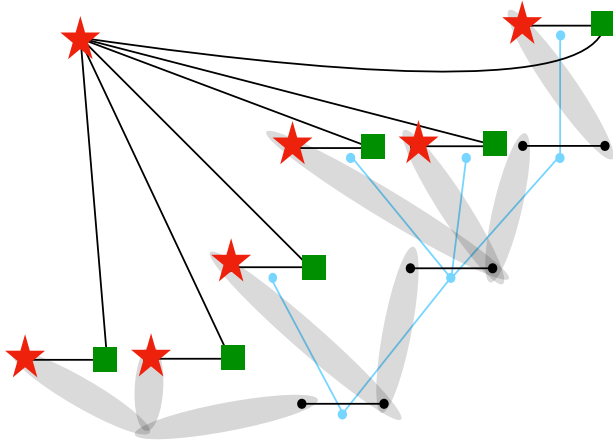

# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$


We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

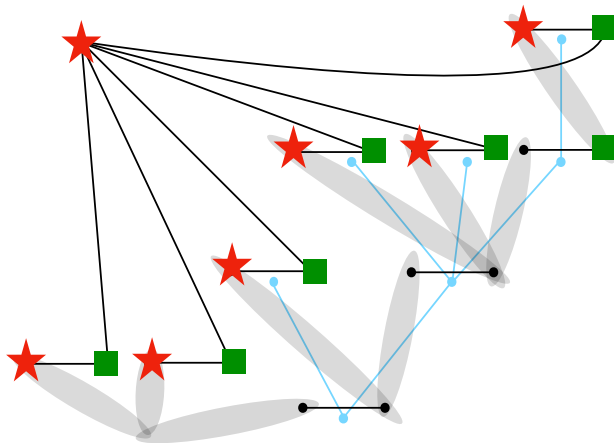




# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

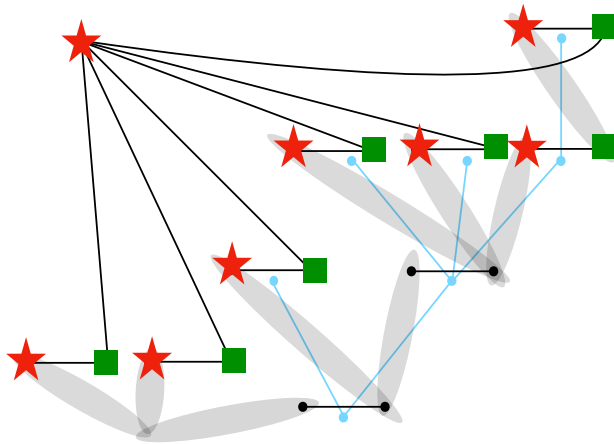


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

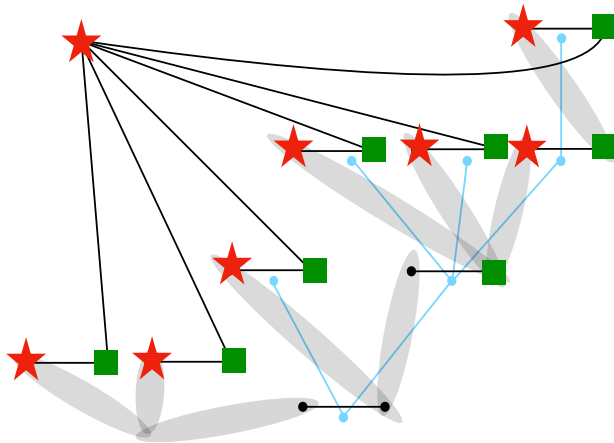


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

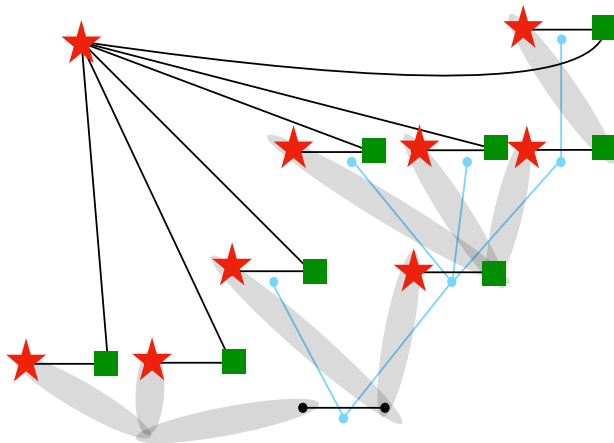


# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

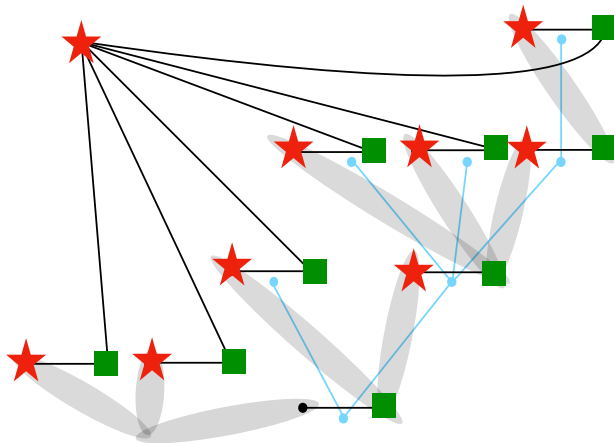

# The reversal: $\widehat{HC} \rightarrow \widehat{WF}$

We want to convert a tree into a hypergraph that has a proper 2-coloring iff the tree has a path.

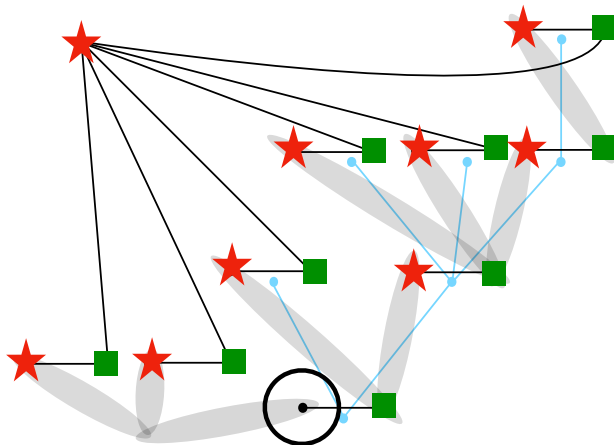

# Weihrauch reductions

## Sample problems

WF: input a tree  $T$ ; output 1 iff  $T$  is well-founded.

HC: input a hypergraph  $H$ ; output 1 iff  $H$  has a proper 2-coloring.

## Parallelization

$\widehat{\text{HC}}$ : input an infinite sequence of hypergraphs; output list of indices of hypergraphs with proper 2-colorings.

## Reductions

$P \leq_{\text{sw}} Q$  if there are uniformly computable procedures  $\varphi$  and  $\psi$  such that

$$\begin{array}{ccc} P_{\text{input}} & \xrightarrow{\varphi} & Q_{\text{input}} \\ \downarrow & & \downarrow \\ P_{\text{output}} & \xleftarrow{\psi} & Q_{\text{output}} \end{array}$$

## Equivalences

$P \equiv_{\text{sw}} Q$  iff  $P \leq_{\text{sw}} Q$  and  $Q \leq_{\text{sw}} P$

# Weihrauch equivalences

$$\text{WF} \equiv_{\text{sW}} \text{WF}_L \equiv_{\text{sW}} \text{HC}$$

$$\widehat{\text{WF}} \equiv_{\text{sW}} \widehat{\text{WF}}_L \equiv_{\text{sW}} \widehat{\text{HC}}$$

Another problem

PK: input a tree  $T$ ; output the perfect kernel of  $T$ .

$$\widehat{\text{WF}} \equiv_{\text{sW}} \text{PK}$$

These results appear in *Leaf management* [4]

# References

- [1] Caleb Davis, Jeffry L. Hirst, Jake Pardo, and Tim Ransom, *Reverse mathematics and colorings of hypergraphs*, Archive for Mathematical Logic (2018).  
[DOI 10.1007/s00153-018-0654-z](https://doi.org/10.1007/s00153-018-0654-z).
- [2] Harvey Friedman, *Some systems of second order arithmetic and their use*, Proceedings of the International Congress of Mathematicians (Vancouver, B. C., 1974), Vol. 1, 1975, pp. 235–242.  
<http://www.mathunion.org> MR0429508.
- [3] Harvey Friedman, *Abstracts: Systems of second order arithmetic with restricted induction, I and II*, J. Symbolic Logic **41** (1976), 557–559.  
<http://www.jstor.org/stable/2272259>.
- [4] Jeffry L. Hirst, *Leaf management*. Submitted. Available at [arxiv.org/abs/1812.09762](https://arxiv.org/abs/1812.09762).
- [5] Stephen G. Simpson, *Subsystems of second order arithmetic*, 2nd ed., Perspectives in Logic, Cambridge University Press, Cambridge; Association for Symbolic Logic, Poughkeepsie, NY, 2009.  
[10.1017/CBO9780511581007](https://doi.org/10.1017/CBO9780511581007) MR2517689.